

Forenta

Morristown, TN U.S.A.

"C" Series Dry Cleaning Scissor Leggers

Models 471/481 SLMAC/SLMC



- Re-Designed Bucks and Heads – Stronger Dimple Weld Design
- Re-Designed Frames – Fewer Welds, Stronger
- Electric Switches and Timer, Accurate Timing, Simple Maintenance




- Pillow Block Bearings, Durable, Long-Lasting, Economical
- One-Piece Table Design, Durable, Attractive

Iron Attachment, Sleeve Board, Water Spray Optional.

Specifications

Models 471/481 SLMAC/SLMC

Electrical connections		471/481 SLMAC/SLMC	
Voltage	120V 1PH 50/60Hz .5amps	Standard	
Voltage	230V 1PH 50/60Hz .25amps	optional	
Optional Iron Attachment:			
Voltage	120V 1PH 50/60Hz	Wattage	1000
Approx. Consumption/hour			0.5 KWH
Steam and Air connection			
Steam Inlet	NPT	1/2"	
Steam Outlet	NPT	1/2"	
Rec. steam pressure	PSIG	75-85	
	kPa	517-586	
Steam consumption @ 80psig(552 kPa)	lb/hr	51.8	
	kg/hr	23.5	
Compressed air	NPT	3/8"	
Air consumption	free air/cycle at 80psig	0.32 FT ³	
	free air/cycle at 552kPa	.009m ³	
Rec. air pressure	PSIG	80	
	kPa	552	
Air Vacuum Connection	NPT	1 1/4"	
Weight (crated)			
Shipping	471/481 SLMAC	lbs	850
		kg	386
	471/481 SLMC	lbs	822
		kg	373
1	Control Push Buttons	4	Steam Outlet connection
2	Steam connection	5	Air Vacuum Connection
3	Air connection	6	Electrical Connection

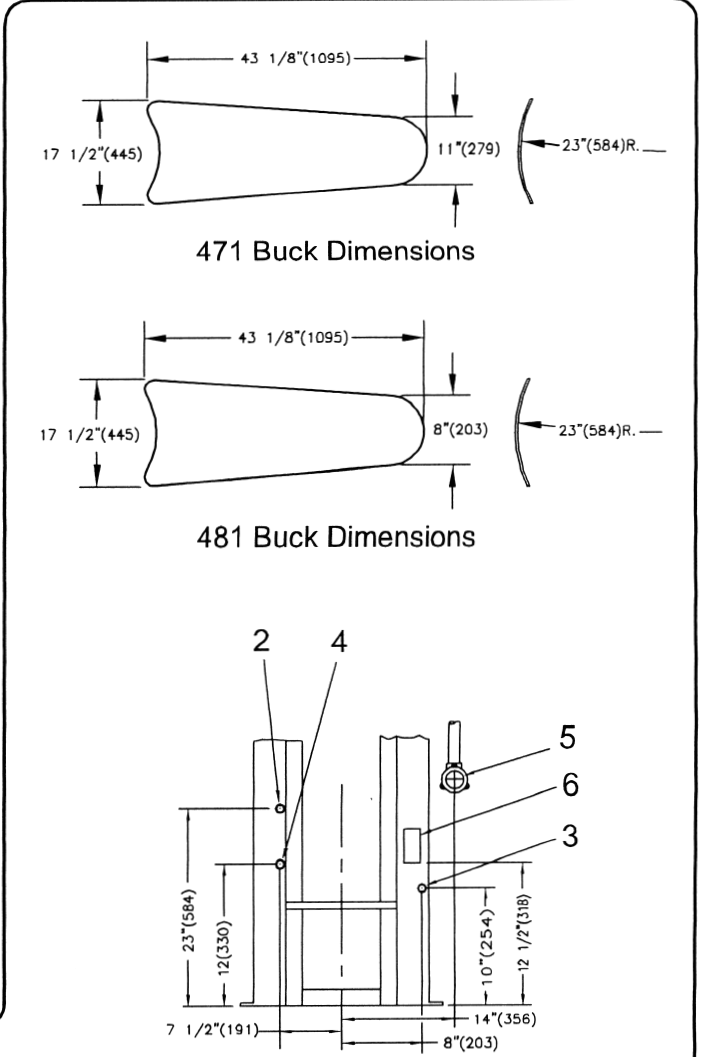

Detail Line Drawing (millimeters shown in parentheses)

