

Forenta

Morristown, TN U.S.A.

"C" Series Dry Cleaning Scissor Leggers

Models 471/481/491 SLMAC/SLMC



- Model SLMC Manual (Non-Automatic) Operational Cycle
- Model SLMAC Automatic Cycle for Pressing Pants and Manual Operation for Other Garments
- Available with Different Size Heads and Bucks for Versatility
- New Wider Head and Buck Available with Model 491




- Close Head with One Hand; Two Hands Required to Lock
- No Vacuum-Pick-Up Feature with Head Opening
- All Models Available with Grid Plate or with Hot Head
- Durable Frame and Bearings
- Adjustable Timers to Control Individual Functions in Automatic Cycle
- Optional Kit Available to Make Sandwich Double Legger

Iron Attachment, Sleeve Board, Water Spray Optional.

Specifications

Models 471/481/491 SLMAC/SLMC

| | | | |
|-------------------------------------|--------------------------|---------------------------|------|
| Electrical connections | | 471/481/491 SLMAC/SLMC | |
| Voltage | 120V 1PH 50/60Hz .5amps | Standard | |
| Voltage | 230V 1PH 50/60Hz .25amps | optional | |
| Optional Iron Attachment: | | | |
| Voltage | 120V 1PH 50/60Hz | Wattage | 1000 |
| Approx. Consumption/hour | | 0.5 KWH | |
| Steam and Air connection | | | |
| Steam Inlet | NPT | 1/2" | |
| Steam Outlet | NPT | 1/2" | |
| Rec. steam pressure | PSIG | 75-85 | |
| | kPa | 517-586 | |
| Steam consumption @ 80psig(552 kPa) | BHP | 1.5 | |
| | kg/hr | 23.5 | |
| | lb/hr | 51.8 | |
| Compressed air | NPT | 3/8" | |
| Air consumption | free air/cycle at 80psig | 0.32 FT ³ | |
| | free air/cycle at 552kPa | .009m ³ | |
| Rec. air pressure | PSIG | 80 | |
| | kPa | 552 | |
| Air Vacuum Connection | NPT | 1 1/4" | |
| Weight (crated) | | | |
| Shipping | lbs | 990 | |
| | kg | 449 | |
| 1 Control Push Buttons | | 4 Steam Outlet connection | |
| 2 Steam connection | | 5 Air Vacuum Connection | |
| 3 Air connection | | 6 Electrical Connection | |

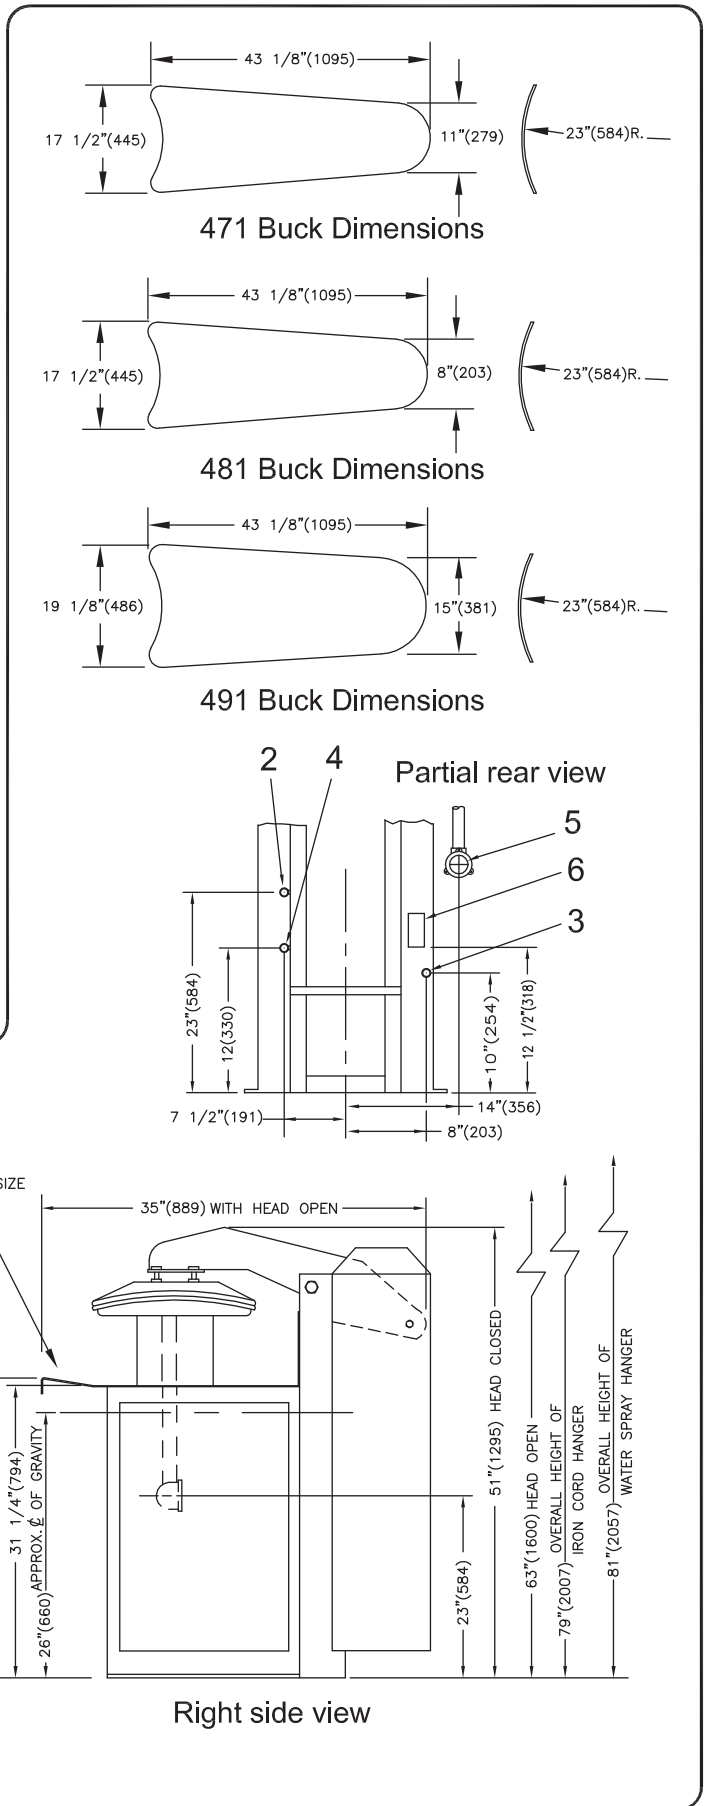

Detail Line Drawing (millimeters shown in parentheses)

